

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

154.1050

10/088303

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

INTERNATIONAL APPLICATION NO.
PCT/FR00/02608

INTERNATIONAL FILING DATE
September 20, 2000

PRIORITY DATE CLAIMED
September 28, 1999

TITLE OF INVENTION
DEVICE FOR HEAT TRANSFER BETWEEN TWO WALLS

APPLICANT(S) FOR DO/EO/US
Eugeniusz RYLEWSKI

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☐ This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
2. ☒ This is an express request to immediately begin national examination procedures (35 U.S.C. 371(f)).
3. ☐ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
4. ☐ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
5. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
6. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
7. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
8. ☐ An oath or declaration of the inventor (35 U.S.C. 371(c)(4)).
9. ☐ A translation of the Annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 10-15 below concern document(s) or information included:

10. ☒ An Information Disclosure Statement Under 37 CFR 1.97 and 1.98.
11. ☐ An assignment document for recording.
Please mail the recorded assignment document to:
 - a. ☐ the person whose signature, name & address appears at the bottom of this document.
 - b. ☐ the following:
12. ☐ A preliminary amendment.
13. ☐ A substitute specification
14. ☐ A change of power of attorney and/or address letter.
15. ☒ Other items or information: PCT Form PCT/IB/304; PCT Form PCT/IB/308; PCT Request; Copy of International Preliminary Examination Report in French.

107088303

1010 Rec'd PCT/PTC 1 8 MAR 2002

☒ The U.S. National Fee (35 U.S.C. 371(c)(1)) and other fees as follows

| CLAIMS | (1) FOR | (2) NUMBER FILED | (3) NUMBER EXTRA | (4) RATE | (5) CALCULATIONS |
|--------|--|---------------------|---------------------|------------|------------------|
| | TOTAL CLAIMS | 14 -20= | 0 | x \$ 18.00 | 0.00 |
| | INDEPENDENT CLAIMS | 1 -3= | 0 | x \$ 84.00 | 0.00 |
| | MULTIPLE DEPENDENT CLAIM(S) (if applicable) | | | +\$280.00 | 0.00 |
| | BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(4): <input checked="" type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO\$1,040 <input type="checkbox"/> International preliminary examination fee (37 C.F.R. 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO.....\$ 890 <input type="checkbox"/> International preliminary examination fee (37 C.F.R. 1.482) not paid to USPTO but international search fee (37 C.F.R. 1.445(a)(2) paid to USPTO...\$ 740 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provision of PCT Article 33(1)-(4).....\$ 710 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2) to (4)\$ 100 | | | | 1,040.00 |
| | Surcharge of \$130 for furnishing the National fee or oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 mos. from the earliest claimed priority date (37 CFR 1.482(e)). | | | | 0.00 |
| | TOTAL OF ABOVE CALCULATIONS | | | | 1,040.00 |
| | Reduction by 1/2 for filing by small entity, if applicable. Affidavit must be filed also. (Note 37 CFR 1.9, 1.27, 1.28.) | | | | 0.00 |
| | SUBTOTAL | | | | 1,040.00 |
| | Processing fee of \$130 for furnishing the English Translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 mos. from the earliest claimed priority date (37 CFR 1.482(f)). | | | | |
| | TOTAL NATIONAL FEE | | | | 1,040.00 |
| | Fee for recording the enclosed assignment (37 CFR 1.21(h)). | | | | +0.00 |
| | TOTAL FEES ENCLOSED | | | | 1,040.00 |

- a. ☒ A check in the amount of \$1,040.00 to cover the above fees is enclosed.
 b. ☐ Please charge my Deposit Account No. 19-3935 in the Amount of \$ to cover the above fees. A duplicate copy of this sheet is enclosed.
 c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, credit any overpayment to Deposit Account No. 19-3935. A duplicate copy of this sheet is enclosed.



21171

PATENT TRADEMARK OFFICE

SUBMITTED BY: STAAS & HALSEY LLP

| | | | |
|-----------|----------------------|----------|----------------|
| Type Name | James D. Halsey, Jr. | Reg. No. | 22,729 |
| Signature | | Date | March 13, 2002 |

10014303-072002
10/088303
JC10 Rec'd PCT/PTO 18 MAR 2002

Docket No.: 154.1050

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of:

Eugeniusz RYLEWSKI

Serial No.

Group Art Unit:

Confirmation No.

Filed: March 13, 2002

Examiner:

For: DEVICE FOR HEAT TRANSFER BETWEEN TWO WALLS

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Before examination of the above-identified application, please amend the application as follows:

IN THE ABSTRACT:

Please INSERT the attached new Abstract after page 20 of the specification.

REMARKS

This Preliminary Amendment is submitted to improve the form of the specification as originally-filed.

It is respectfully requested that this Preliminary Amendment be entered in the above-referenced application.

Preliminary Amendment


Docket No.: 154.1050

If there are any additional fees associated with filing of this Preliminary Amendment, please charge the same to our Deposit Account No. 19-3935.

Respectfully submitted,

STAAS & HALSEY LLP

Date: 3/11/11

By: 
James D. Halsey, Jr.
Registration No. 22,729

700 Eleventh Street, NW, Suite 500
Washington, D.C. 20001
(202) 434-1500

VERSION WITH MARKINGS TO SHOW CHANGES MADE

IN THE ABSTRACT:

Please add the following Abstract after page 20 of the Specification:

--ABSTRACT

The invention concerns a heat transfer device comprising an insulating module (12) designed to be inserted between a first wall (14) and a second wall (16) to define a closed loop wherein flows a heating medium (FC) which comprises a first channel (28) extending substantially vertically along the first wall (14) and a second channel (30) extending substantially vertically along the second wall (16), the first channel and the second channel being mutually offset in the vertical direction to define a low channel and a high channel, as well as an upper channel (32) and a lower channel (34) linking the first channel and the second channel, such that heating medium (FC) flows freely or is blocked naturally in the loop when on the basis of the respective temperatures of the high channel and the low channel. The invention is particularly useful for heating or cooling buildings.--

10/088303

JC10 Rec'd PCT/PTO 18 MAR 2002

Device for heat transfer between two walls

The invention relates to a device for heat transfer between a first wall and a second wall, which are respectively in contact with a first thermal mass and a second thermal mass

Devices of this type are already known which are used in particular for transferring heat between a wall capable of being heated by solar radiation and another wall, such as a wall of a building for example, a water reservoir etc. In this case, one of the thermal masses is the external ambient air, whereas the other thermal mass is the building, reservoir, etc..

In this special application, such devices must be able to transfer the heat originating from solar radiation to the wall to be heated, whilst preventing a thermal transfer in the opposite direction when the solar radiation has stopped.

The known devices do not always make it possible to solve all the situations that arise in practice and are generally limited to the heating of one wall and one associated thermal mass on the basis of solar radiation and thermal insulation of this thermal mass when the solar radiation has stopped.

There are also other situations for which it would be desirable to cool the thermal mass in question.

Therefore there is a need to procure a device for heat transfer which is capable of responding to different situations in order to permit in particular either heating or thermal insulation, or on the other hand cooling or thermal insulation.

The invention proposes to this end a device for heat transfer of the type mentioned in the introduction, which comprises an insulating unit capable of being interposed

between the first wall and the second wall in order to define a closed loop for the circulation of a heat-exchanging fluid, which comprises a first channel extending substantially vertically along the first wall and a second channel extending substantially vertically along the second wall, the first channel and the second channel being staggered with respect to one another in the vertical direction in order to define a 'low channel' and a 'high channel', as well as an upper channel connecting the first channel and the second channel and a lower channel connecting the first channel and the second channel, in such a manner that the circulation of the heat-exchanging fluid is effected naturally in the loop when the low channel is at a higher temperature than the high channel, which permits a heat transfer, and that the circulation of fluid is naturally blocked in the loop when the low channel is at a lower temperature than the high channel, which prevents heat transfer by forming a thermal insulator.

Thus a device for heat transfer is obtained which can be called a 'thermal diode' by analogy with electricity.

This heat transfer device, which has numerous applications, makes it possible by virtue of the configuration of the channels, and in particular of the vertical staggering of the first channel and second channel, to allow or prevent circulation of the heat-exchanging fluid by simple convection movement, and this according to the respective temperatures of the first and second channels.

In other words, the circulation of the heat-exchanging fluid is effected or blocked naturally by the convection of the heat-exchanging fluid.

When the low channel is at a higher temperature than the high channel, the fluid tends to rise naturally from the low channel to the high channel by using the upper channel (which is rising). Then the fluid cools in the high channel, which has a lower temperature, and falls naturally back down to the low channel by the lower channel (which is falling), and so on.

Conversely, when the low channel is at a lower temperature than the high channel, the fluid tends to rise to the high channel and to stagnate in this channel, which is at a higher temperature than the low channel. Due to this stagnation, the high channel is filled with the hot heat-exchanging fluid, which makes it possible to provide thermal insulation to the thermal mass located on the side of the high channel. This gives rise to a phenomenon of temperature stratification, wherein the hottest heat-exchanging fluid stagnates in the upper part of the loop and the coldest heat-exchanging fluid stagnates in the lower part of the loop.

Obviously, such a device has numerous applications, one being the heating, thermal insulation or cooling of buildings.

In one embodiment of the invention, the first channel forms a low channel and the second channel forms a high channel, which makes it possible to effect a heat exchange when the temperature of the first channel is higher than that of the second channel, and to prevent a heat exchange when the temperature of the first channel is lower than that of the second channel.

In another embodiment, the first channel forms a high channel and the second channel forms a low channel, which makes it possible to effect a heat exchange when the temperature of the first channel is lower than that of the second channel and to prevent a heat exchange when the temperature of the first channel is higher than that of the second channel.

In one embodiment of the invention, the device comprises selection means in order to bring the device into either of two states, comprising a first state wherein the first channel is a low channel and the second channel is a high channel, and a second state wherein the first channel is a high channel and the second channel is a low channel.

The result is that one and the same device can be used for example to heat, to cool or to insulate thermally a building.

Thus for example, it is possible with this device to effect, during the winter period, heating of the building during the day by solar radiation, and thermal insulation of the building by night. It is equally possible, during the summer period, to carry out thermal insulation of the building by day and cooling by night, if the external temperature is lower than the internal temperature of the building.

In one embodiment, the device comprises first units configured in the first state and second units configured in the second state, and the selection means comprise means of putting into operation either the first units or the second units.

In another embodiment, the units are configured in one state, and the selection means comprise means of changing over in order to change the units to the other state.

Thus for example, the device may be contrived in the form of a shutter or the like combining one or more units and capable of passing from the first state to the second state, or vice versa, by changing over.

It is also conceivable for the device to comprise blocking means to voluntarily block the circulation of heat-exchange fluid and thus to prevent any heat transfer.

In a preferred application of the invention, the first wall is capable of being exposed to solar radiation, whereas the second wall backs on to a thermal mass to be heated or cooled.

Thus the second wall may be for example the outside wall of a building.

Figure 5 a view corresponding to Figure 4, showing the device operating in cooling mode;

- | | |
|-------------------|--|
| Figure 6 | a view in section of a device according to a third embodiment of the invention, contrived as a shutter brought into a first state; |
| Figure 7 | a view corresponding to Figure 6 showing the shutter brought into a second state; |
| Figure 8 | a view in horizontal section showing a shutter contrived to be sliding in a retracted position; |
| Figure 9 | a view similar to Figure 8 showing the shutter in the active position; |
| Figure 10 | a view in vertical section of a device according to another embodiment of the invention operating in heating mode; |
| Figure 11 | a view corresponding to Figure 10 showing the device operating in thermal insulation mode; |
| Figures 12 and 13 | are section views of a device according to the invention comprising blocking means and shown in two diff |

- | | |
|-------------------|---|
| Figure 6 | a view in section of a device according to a third embodiment of the invention, contrived as a shutter brought into a first state; |
| Figure 7 | a view corresponding to Figure 6 showing the shutter brought into a second state; |
| Figure 8 | a view in horizontal section showing a shutter contrived to be sliding in a retracted position, |
| Figure 9 | a view similar to Figure 8 showing the shutter in the active position; |
| Figure 10 | a view in vertical section of a device according to another embodiment of the invention operating in heating mode; |
| Figure 11 | a view corresponding to Figure 10 showing the device operating in thermal insulation mode; |
| Figures 12 and 13 | are section views of a device according to the invention comprising blocking means and shown in two different positions; |
| Figures 14 and 15 | are views corresponding to Figures 12 and 13 showing another device comprising blocking means and shown in two different positions; |
| Figures 16 and 17 | are views respectively in perspective and from the front of a device comprising units according to Figures 12 and 13 alternating with units according to Figures 14 and 15; |

Figure 28A is a view in vertical section of the device in Figures 26 and 27 in a first state; and

Figure 28B is a view corresponding to Figure 28 for a second state of the device.

Figure 1 will be referred to first, which shows a device 10 according to the invention comprising an insulating unit 12 capable of being interposed between a first wall 14 and a second wall 16.

In the example, the wall 14 forms an outer wall capable of being exposed to solar radiation S, whereas the wall 16 forms part of a wall 18 of a building. The walls 14 and 16 are substantially vertical and are located at a distance D which may, for example, be between 100 and 200 mm.

The wall 14 may, in its simplest form, consist of a plain sheet of metal, e.g. coated with a black paint.

The unit 12 comprises at least one insulating core 20, which has in straight vertical section substantially the shape of a parallelogram. This insulating core 20 is housed for example between two vertical columns 22 (Figure 3) forming a frame. This insulating core 20 is placed between the first wall and the second wall, but without coming into contact with them. The unit further comprises an upper insulating partition 24 and a lower insulating partition 26 capable of being placed respectively above and below the core 20. These two partitions 24 and 26 are inclined and extend between the walls 14 and 16.

Obviously the partition 24 forms a lower partition for another insulating core 20 located above and the partition 26 forms an upper wall for another core 20 placed below. The partitions 24 and 26 are also mounted between the columns 22 (Figure 3).

Obviously, the core 20, the partitions 24 and 26 and the walls 14 and 16 help thus to define a circulation flow as a closed loop. This loop comprises a first channel 28

extending substantially vertically along the first wall 14, and a second channel 30 extending substantially vertically along the second wall 16 (Figure 1).

These channels 28 and 30 are staggered with respect to one another in the vertical direction in order to define a 'low channel' (in this case the first channel 28) and a 'high channel' (in this case the second channel 30).

The channels 28 and 30 are connected, in the upper region, by an upper channel 32, and in the lower region by a channel 34. These channels 32 and 34 are substantially parallel to one another and are directed upwards from the channel 28 in the direction of the channel 30. Because these channels 28 and 30 are staggered, the channel 28 has a high point PH which is substantially at the same level as the low point PB of the channel 30. Obviously, the high point PH could be at a slightly higher level than the low point PB or even at a slightly lower level than the low point PB.

The channels 28, 30, 32 and 34 are sealing-tight and have a heat-exchanging fluid FC passing through them, which in the example is air. This air may circulate naturally in the channels without any external help, according to the differences in temperature existing between the walls 14 and 16.

In the case of Figure 1, the device is used in winter and by day to carry out heating of the wall 18 from solar radiation S. The wall 14 and therefore the channel 28 (low channel) are at a temperature higher than the wall 16, therefore of the channel 30 (high channel). The fluid FC is heated in the channel 28 and tends to rise naturally because it becomes lighter, and thus uses the channel 32 which is rising in order to reach the channel 30 along the wall 16. As this wall is at a lower temperature than the wall 14, the fluid cools and tends to fall naturally to pass along the wall 16 and then drop via the channel 34 in order to return to the channel 28 and so on. Provided that the wall 14 is at a higher temperature than the wall 16, the fluid FC circulates

Obviously, a device for heat transfer is thus obtained which can be termed a 'thermal diode' and which operates naturally, without any external intervention, in order to effect in the winter period day-time heating (Figure 1) and night-time thermal insulation (Figure 2).

Now, these two devices are symmetrical. It is thus possible to move from the position of Figures 1 and 2 to that of Figures 4 and 5 by a changeover.

A convenient way is to realise a shutter or the like as is shown in Figure 6. This shutter 36 comprises cores 20 alternating with partitions 24 or 26 and disposed between two walls 14 and 16. The wall 14 and the wall 16 can be each formed by a simple glass pane or metal sheet. The wall 14 is black or dark-coloured, whereas the wall 16 is white or light-coloured. The shutter 36 is placed behind a glass pane 42 of a building, which is exposed to solar radiation S. The shutter can be realised in the form of a horizontally sliding shutter (Figures 8 and 9) and capable of retracting into a recess 43 of the wall 18 (Figure 8) or of being placed behind the glass pane 42 (Figure 9).

During the winter period, the device is placed in the position shown in Figure 6 and operates in a similar manner to that of Figures 1 and 2 described above.

During the summer period, the shutter is changed over and is located in the position of Figure 7, which corresponds to the operation described above for Figures 4 and 5. In other words, thermal insulation is obtained by day, and cooling by night. This is favoured by the fact that the white surface (wall 16) is now located facing solar radiation S, whereas the black surface (wall 14) is opposite.

Reference will now be made to Figures 10 and 11, which show another embodiment of the invention related to that of Figures 1 and 2. The main difference resides in the fact that the first wall 14 comprises successively a glass pane 44 exposed to solar radiation, a fabric 46 of glass or plastics material, and a metal sheet 48 having one side coated in black 50 and the other side coated in white 52.

Furthermore, the wall 14 is equipped with a blocking element 54 which, in the position in Figure 10, is oriented towards the exterior. During the winter period, the

device is in the configuration in Figure 10 and operates in a manner similar to that of Figures 1 and 2.

During the summer period, the wall 14 is changed over, so that the blocking element 54 covers the channel 28. Consequently, the circulation of heat-exchanging fluid FC is prevented voluntarily. As a result, the heat-exchanging fluid cannot effect a thermal transfer from the wall 14 exposed to solar radiation to the wall 16 on the side of the wall of the building.

In the embodiment of Figures 12 and 13, a device is shown which is related to that of Figures 10 and 11. However, the blockage of circulation of the fluid in summer is effected here by rotation of the core 20 about an axis 56.

During the winter period, the core 20 is in the position shown in Figure 12, i.e. it helps to define the circulation channels in order to effect heating. During the summer period, the core 20 is rotated about its axis so that it comes into abutment with the partitions 24 and 26 in order to block circulation of the fluid in the loop, as is shown in Figure 13. Thus insulation is effected.

The embodiment in Figures 14 and 15 is related to that of Figures 12 and 13, with an arrangement according to that of Figures 4 and 5. This means that the channel 28 and the channel 30 respectively form the high channel and the low channel. The core 20 is also mounted pivotably about an axis 56. During the summer period (Figure 15), the core is placed so as to permit circulation of the heat-exchanging fluid, whereas during the winter period (Figure 14), the core has pivoted in order to block the circulation of fluid in the channels 28 and 30.

The device according to Figures 16 and 17 comprises first units 12a according to Figures 12 and 13, which alternate with second units 12b according to Figures 14 and 15. These units are aligned and disposed so that the cores 20 can pivot

synchronously. In Figures 16 and 17, the units 12a are in the winter position for heating (cf. Figure 12), and the units 12b in the winter position for insulation (cf. Figure 14). If the cores are pivoted synchronously, the units 12a move into the summer position for insulation (cf. Figure 13) and the units 12b into the summer position for cooling (cf. Figure 15).

In the embodiment according to Figures 18 and 19, the channels 28 and 30 of the device are interconnected by two upper channels 32a and 32b, which intersect at right angles and by two lower channels 34a and 34b which intersect at right angles. At the two intersections thus formed, two selectors 58 and 60 are disposed respectively, each consisting of a four-way rotary valve provided to be actuated synchronously and placed in either of two positions. The above-mentioned channels are defined between the walls 14 and 16 and end cores 62 and 64, and furthermore cross a central core 66.

In a first position, or winter position, shown in Figure 18, the circulation of the heat-exchanging fluid is allowed in the channels 32a and 34a, which are oriented upwards from the channel 28 to the channel 30 and is blocked in the channels 32b and 34b, which are oriented downwards from the channel 28 to the channel 30. The device thus operates like that in Figures 1 and 2.

In a second position, or summer position, shown in Figure 19, the circulation of the heat-exchanging fluid is allowed in the channels 32b and 34b, and is blocked in channels 32a and 34a. The device thus operates like that in Figures 4 and 5.

The device in Figures 20 and 21 is a block 68 having a general cuboid shape, which is moulded from an insulating material, e.g. a plastics material or cellular concrete. It is provided to be able to be stacked vertically with one or more other similar blocks, as is shown in Figure 21. It comprises two portions of core 20a and 20b, located on either side of an oblique partition 70. It defines two vertical channels 28 and 30 located respectively along two opposite large vertical faces of the block, as well as an

oblique channel 32 located above the partition 70 and communicating with the vertical channel 28 and another oblique channel 32 located above the partition 70 and communicating with the vertical channel 30. When the blocks are stacked, a device is formed which is related either to that of Figures 1 and 2, or to that of Figures 4 and 5, according to whether the channels 28 are disposed on the side of solar radiation or otherwise. Figure 22 will now be referred to, which shows another embodiment of the invention in which the device is related to that of Figures 1 and 2, but which is used to effect the heating of water circulating in the canalisations 72 backing on to the wall 16.

It will also be noted that the walls 14 and 16 are no longer exactly vertical, but are inclined by an angle A of about 30° to the vertical. Here too, as in Figures 1 and 2, the channel 28 forms a low channel and the channel 30 forms a high channel. Consequently, the heating of water can be effected under the action of solar radiation, and then the cooling of this water can be prevented by using an insulator when the solar radiation has stopped.

The device according to Figure 23 is formed as a shutter 36 mounted pivotably about a vertical axis 74, which allows it to adopt two different states, a first state (Figures 24A and 24B) corresponding to a 'winter' position and a second state (Figures 25A and 25B) corresponding to a 'summer' position. The shutter 36 is capable of pivoting along a wall 18 between the two aforementioned states and is related thus to a shutter having what is known as 'French-style' pivoting.

The shutter 36 is related to that described above with reference to Figures 6 and 7. It comprises cores 20 alternating with partitions 24 or 26 and disposed between two walls 14 and 16. The wall 14 is here a black receiving metal sheet placed behind a glass pane 42, whereas the wall 16 is a white metal sheet. In the 'winter' position, the glass pane 42 and the wall 14 are disposed towards the exterior, whereas the wall 16

During the winter period, the device is placed in the position according to Figures 24A and 24B and operates similarly to that in Figures 1 and 2. During the summer period, the shutter is changed over and operates similarly to that in Figures 4 and 5

Between the glass pane 42 and the wall 14 is provided a series of mobile plates 78 each articulated about a horizontal axis 80 placed behind the glass pane 42. These plates are white in colour and are capable of pivoting according to the position of the shutter 36. In a first state (Figure 28A) corresponding to a winter position, the plates 78 are inclined according to the position of the sun and allow the sun's rays to fall on the metal sheet 14. In a second state (Figure 28B) corresponding to the summer position, the plates 78 pivot in a vertical manner and are thus applied to the rear of the glass pane 42, thus preventing the sun's energy from penetrating into the wall.

Obviously, the invention is not limited to the embodiments described above by way of example, and may have other applications besides the heating, cooling and insulation of buildings. Thus it is possible to effect, with such a device, the heating of an oven (solar oven), the heating of a swimming pool, of a greenhouse, etc.. It is also possible to obtain thermal insulation for refrigeration units.

In all cases, a kind of 'thermal diode' is formed, which allows or prevents circulation of the heat-exchanging fluid consisting of air in a natural manner, which simplifies the realisation of the device.

Furthermore, although the invention has been described with reference to a heat-exchanging fluid formed of air, it is possible to use other media, in particular liquids.

Finally, the realisation of the unit or units is open to numerous modifications, in particular in so far as the choice of insulating material is concerned. This may also consist for example of fabrics or the like.

Claims

1. Device for heat transfer between a first wall and a second wall respectively in contact with a first thermal mass and a second thermal mass, characterised in that it comprises an insulating unit (12) capable of being interposed between the first wall (14) and the second wall (16) in order to define a closed loop for the circulation of a heat-exchanging fluid (FC), which comprises a first channel (28) extending substantially vertically along the first wall (14) and a second channel (30) extending substantially vertically along the second wall (16), the first channel and the second channel being staggered with respect to one another in the vertical direction in order to define a 'low channel' and a 'high channel', as well as an upper channel (32) connecting the first channel and the second channel and a lower channel (34) connecting the first channel and the second channel, in such a manner that the circulation of the heat-exchanging fluid (FC) is effected naturally in the loop when the low channel is at a higher temperature than the high channel, which permits a heat transfer, and that the circulation of heat-exchanging fluid (FC) is naturally blocked in the loop when the low channel is at a lower temperature than the high channel, which prevents heat transfer by forming a thermal insulator.
2. Device according to claim 1, characterised in that the first channel (28) forms a low channel and the second channel (30) forms a high channel, which makes it possible to effect a heat exchange when the temperature of the first channel is higher than that of the second channel, and to prevent a heat exchange when the temperature of the first channel is lower than that of the second channel.
3. Device according to claim 1, characterised in that the first channel (28) forms a high channel and the second channel (30) forms a low channel, which makes it possible to effect a heat exchange when the temperature of the first channel is lower than that of the second channel and to prevent a heat exchange when the temperature of the first channel is higher than that of the second channel.

10. Device according to one of claims 1 to 9, characterised in that the second wall (16) backs on to a wall of a building.

11. Device according to one of claims 1 to 10, characterised in that the heat-exchanging fluid (FC) is air.

12. Device according to one of claims 1 to 11, characterised in that the unit (12) is formed of an insulating material.

13. Device according to one of claims 1 to 12, characterised in that the insulating material is selected from a polymer, a cellular concrete, or a flexible material such as a fabric.

14. Device according to one of claims 1 to 13, characterised in that the unit comprises an insulating core (20) capable of being placed between the first wall (14) and the second wall (16) in order to help define respectively the first channel (28) and the second channel (30), as well as an upper partition (24) and a lower partition (26) capable of being disposed respectively above and below the core (20) in order to help define respectively the upper channel (32) and the lower channel (34).

PATENT COOPERATION TREATY

Sender: THE OFFICE IN CHARGE OF PRELIMINARY INTERNATIONAL EXAMINATION

Addressee:
J BEZAULT
Cabinet NETTER
40 rue Vignon
F-75009 Paris
FRANCE

NOTIFICATION OF SENDING OF THE PRELIMINARY INTERNATIONAL EXAMINATION
(RULE 71.1 OF THE PCT)

Date of dispatch: 31.07.2001

File reference of the applicant or agent: MASA-AFF.21

IMPORTANT NOTIFICATION

International application no.: PCT/FR00/02608

Date of international registration: 20/09/2000 Priority date: 28/09/1999

Applicant: MASA-THERM SA

1. It is notified to the Applicant that the office in charge of preliminary international examination has drawn up the preliminary international examination report for the international application and sends it to them herewith, accompanied if necessary with these enclosures.

2. A copy of the present report and if necessary its enclosures is being sent to the International Office for communication to all chosen offices.

3. If one chosen office or another requires it, the International Office will carry out a translation into English of the report (excluding the enclosures thereof) and will send this to the offices concerned.

4. REMINDER

In order to start the national phase in each chosen office, the applicant must accomplish certain acts (filing of translation and payment of national fees) within a deadline of 30 months of the date of priority (or later for certain offices) (article 39.1)(see also the reminder sent by the International Office in the form PCT/IB/301).

When a translation of the international application must be submitted to a chosen office, it must include the translation of any enclosure of the preliminary international examination report. It is up to the applicant to carry out the translation in question and to submit it directly to each chosen office concerned.

For further details concerning the applicable deadlines and the requirements of the chosen offices, see Volume II of the Guide for Applicants of the PCT.

Authorised official: K Stephan

(12) DEMANDE INTERNATIONALE PUBLIÉE EN VERTU DU TRAITÉ DE COOPÉRATION
EN MATIÈRE DE BREVETS (PCT)

(19) Organisation Mondiale de la Propriété
Intellectuelle
Bureau international



(43) Date de la publication internationale
5 avril 2001 (05.04.2001)

PCT


(10) Numéro de publication internationale
WO 01/23812 A1

- (51) Classification internationale des brevets⁷: **F24J 2/04** (71) Déposant (pour tous les États désignés sauf CA, US):
MASA-THERM S.A. [CH/CH]; L'Oselière, CH-2043
Boudevilliers (CH).
- (21) Numéro de la demande internationale:
PCT/FR00/02608 (71) Déposant et
(72) Inventeur (pour CA, US seulement): **RYLEWSKI, Euge-**
niesz [FR/FR]; 43bis, avenue du Général Leclerc, F-78470
Saint Remy les Chevreuse (FR).
- (22) Date de dépôt international:
20 septembre 2000 (20.09.2000)
- (25) Langue de dépôt: français (74) Mandataire: **BEZAULT, Jean; Cabinet Netter, 40, rue**
Vignon, F-75009 Paris (FR).
- (26) Langue de publication: français
- (30) Données relatives à la priorité:
99/12080 28 septembre 1999 (28.09.1999) FR (81) États désignés (national): AE, AG, AL, AM, AT, AU, AZ,
BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE,

[Suite sur la page suivante]

(54) Title: DEVICE FOR HEAT TRANSFER BETWEEN TWO WALLS

(54) Titre: DISPOSITIF DE TRANSFERT THERMIQUE ENTRE DEUX PAROIS

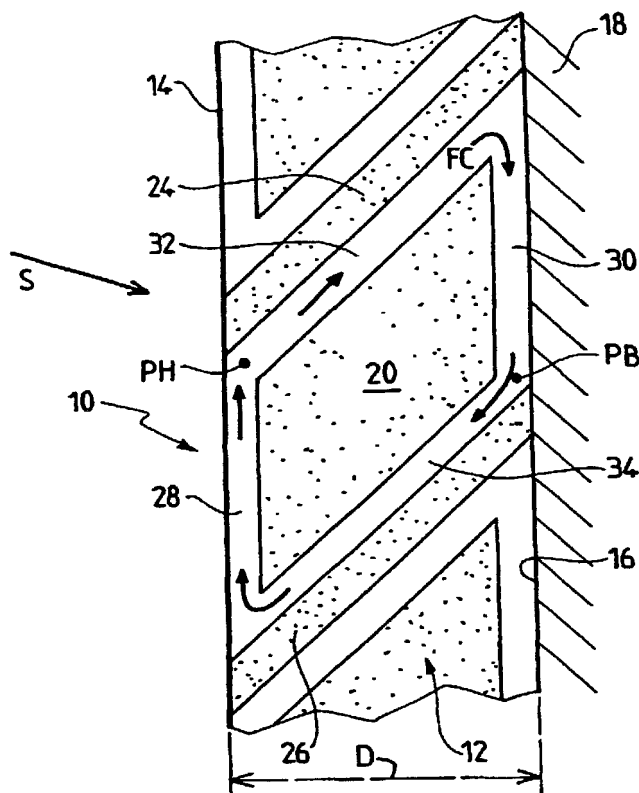

(57) Abstract: The invention concerns a heat transfer device comprising an insulating module (12) designed to be inserted between a first wall (14) and a second wall (16) to define a closed loop wherein flows a heating medium (FC) which comprises a first channel (28) extending substantially vertically along the first wall (14) and a second channel (30) extending substantially vertically along the second wall (16), the first channel and the second channel being mutually offset in the vertical direction to define a low channel and a high channel, as well as an upper channel (32) and a lower channel (34) linking the first channel and the second channel, such that heating medium (FC) flows freely or is blocked naturally in the loop when on the basis of the respective temperatures of the high channel and the low channel. The invention is particularly useful for heating or cooling buildings.

(57) Abrégé: Un dispositif de transfert thermique comprend un module isolant (12) propre à être interposé entre une première paroi (14) et une seconde paroi (16) pour délimiter une boucle fermée de circulation d'un fluide caloporteur (FC) qui comporte un premier canal (28) s'étendant sensiblement verticalement le long de la première paroi (14) et un second canal (30) s'étendant sensiblement verticalement le long de la seconde paroi (16), le premier canal et le second canal étant décalés mutuellement dans la direction verticale pour définir un canal bas et un canal haut, ainsi qu'un canal supérieur (32) et un canal inférieur (34) reliant le premier canal et le second canal, en sorte que la circulation du fluide caloporteur (FC) s'effectue ou est bloquée naturellement dans la boucle lorsque

[Suite sur la page suivante]

WO 01/23812 A1

1/10

FIG. 1

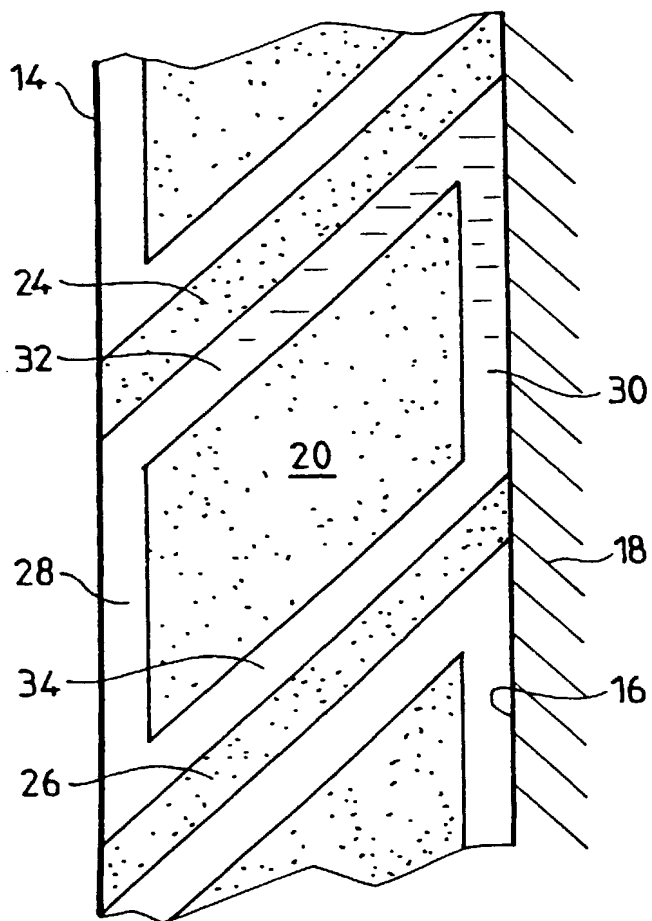
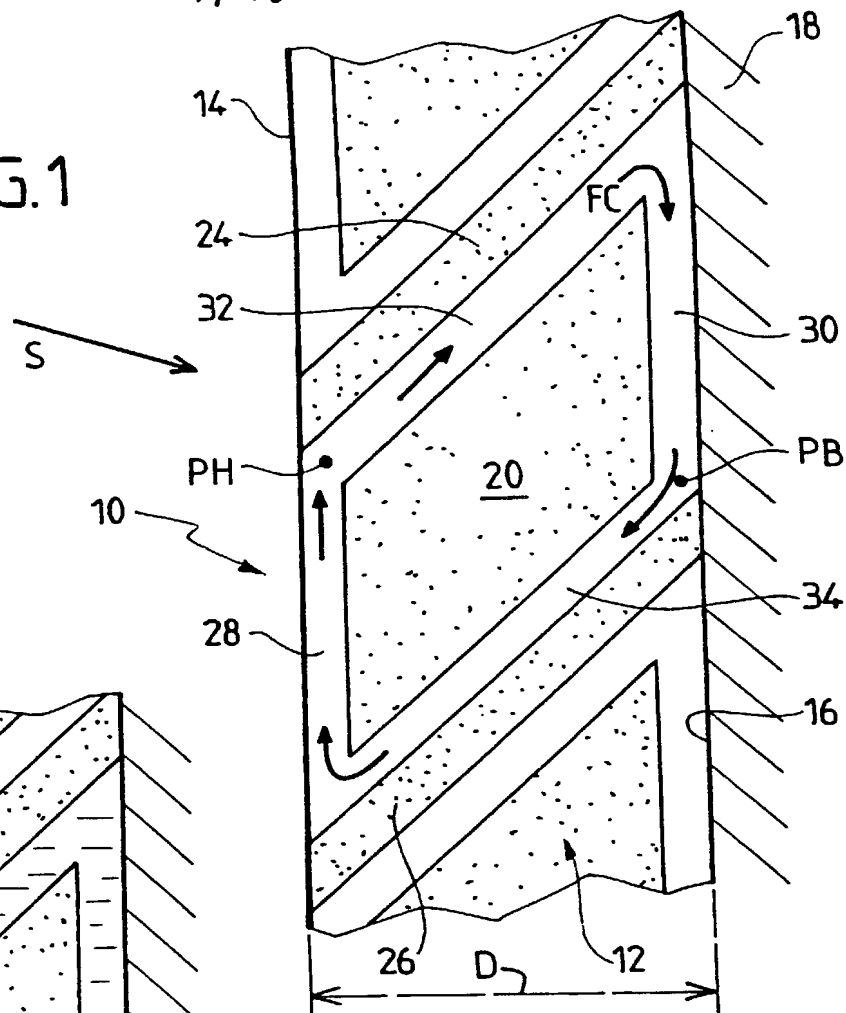


FIG. 2

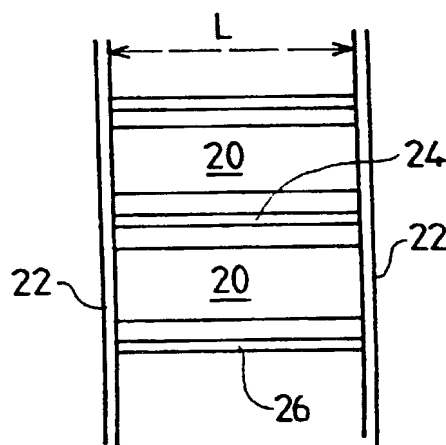


FIG. 3

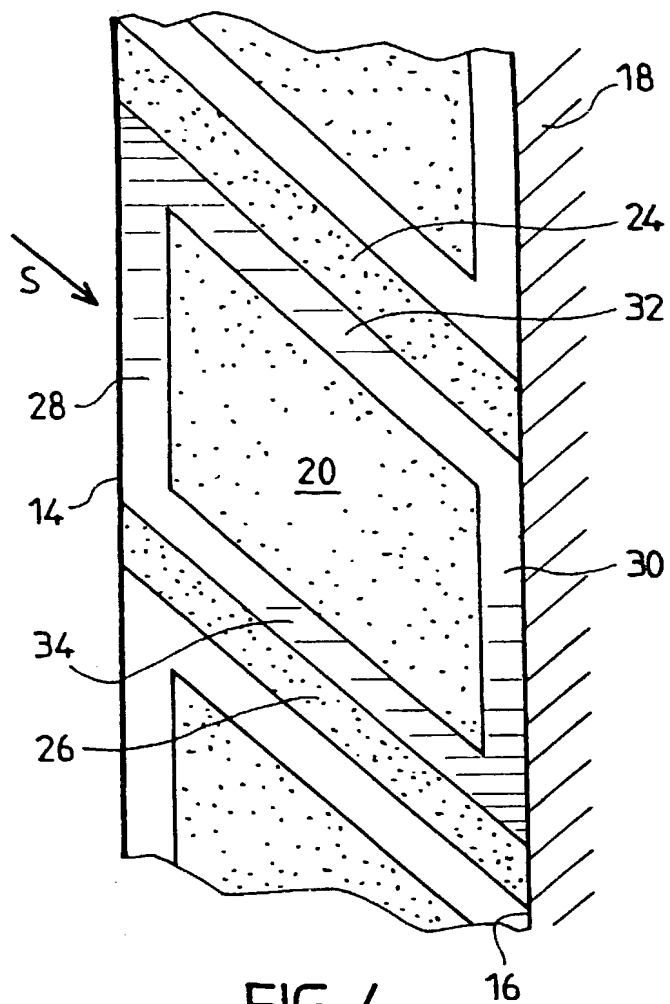


FIG. 4

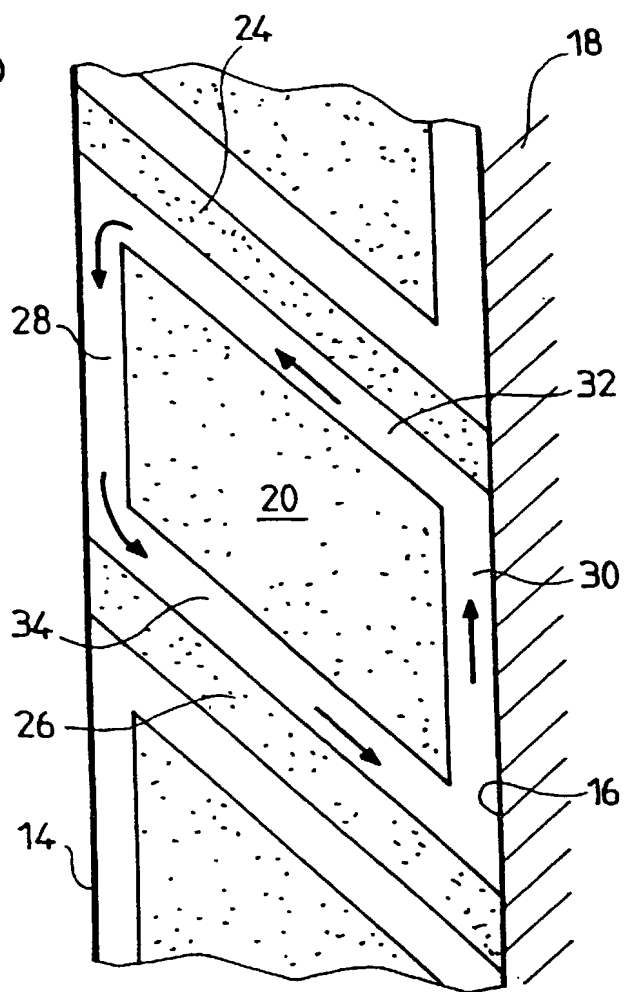


FIG. 5

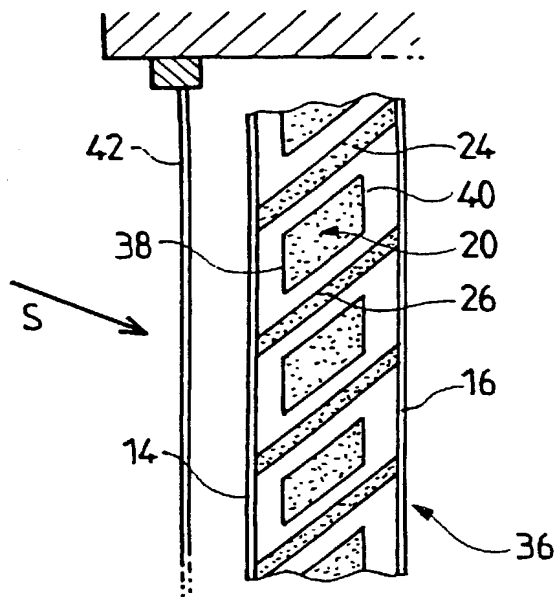


FIG. 6

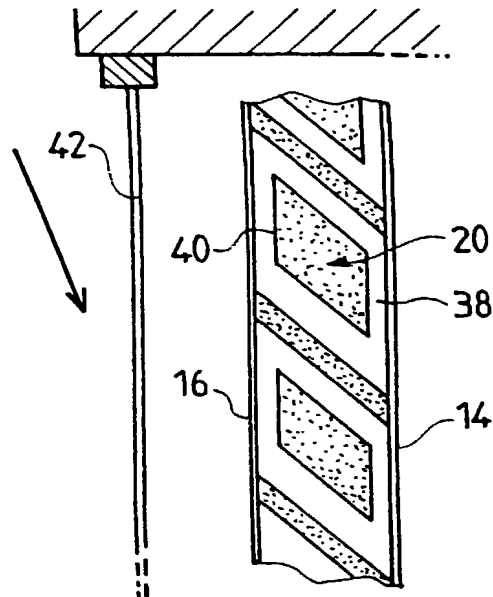


FIG. 7

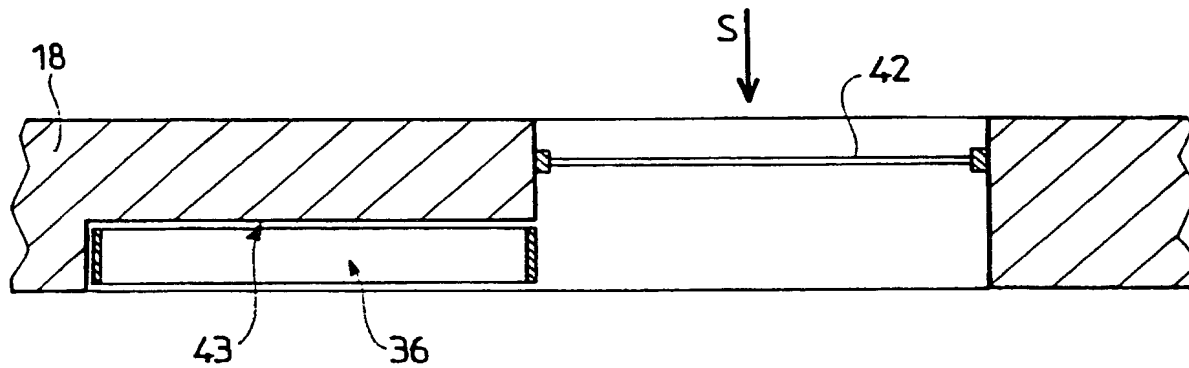


FIG. 8

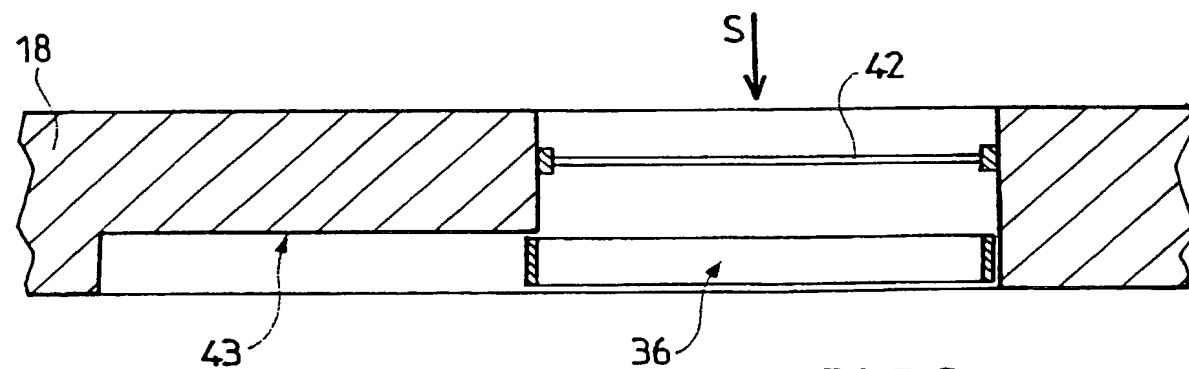


FIG. 9

4/10

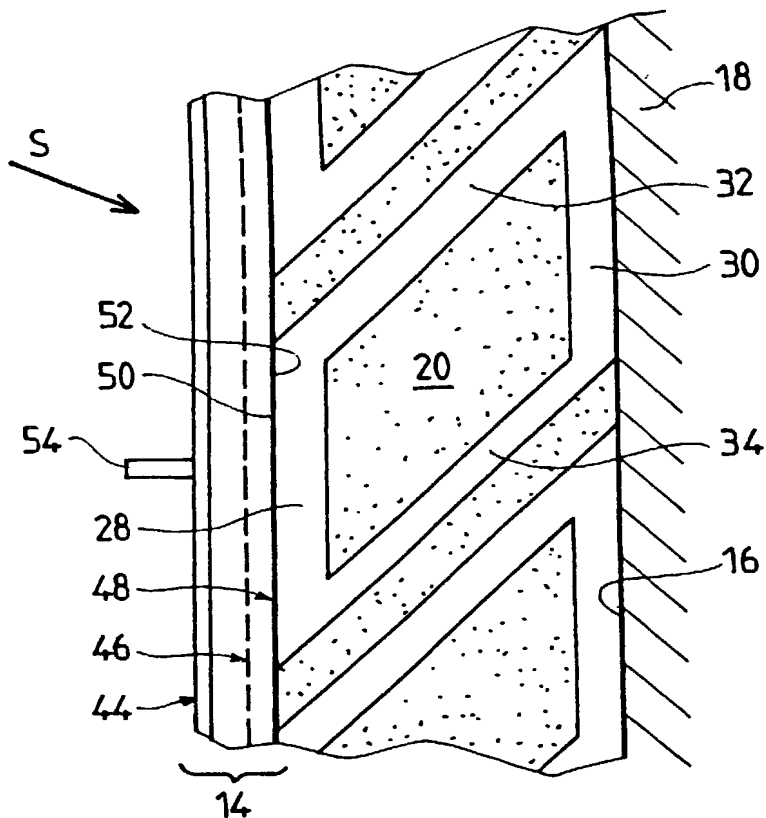


FIG.10

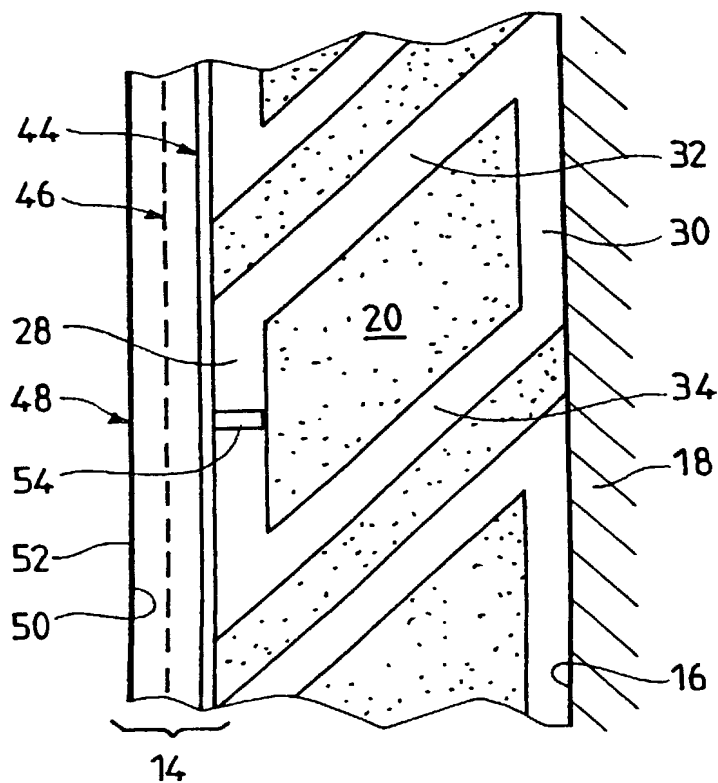


FIG.11

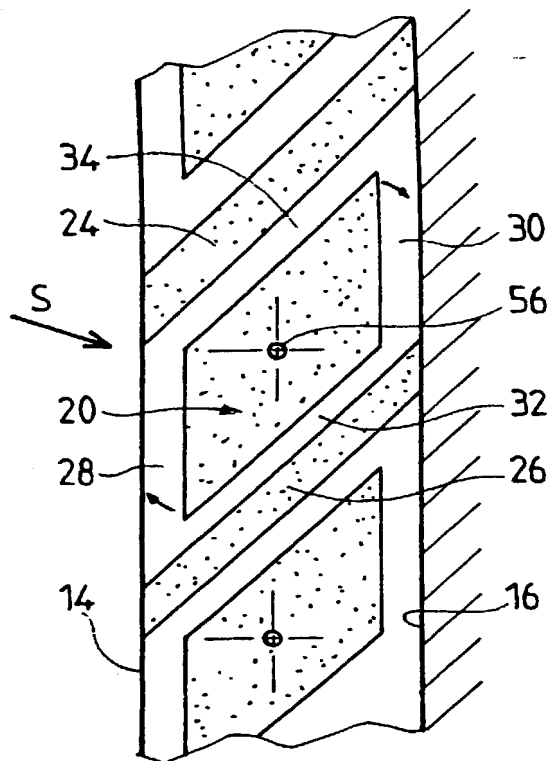


FIG. 12

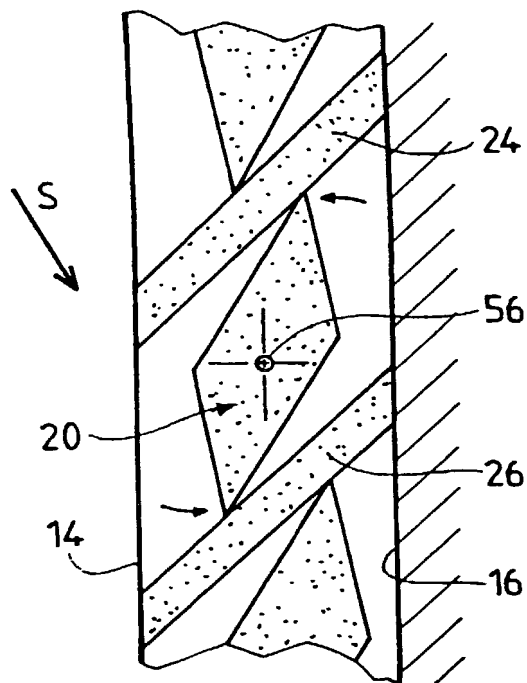


FIG. 13

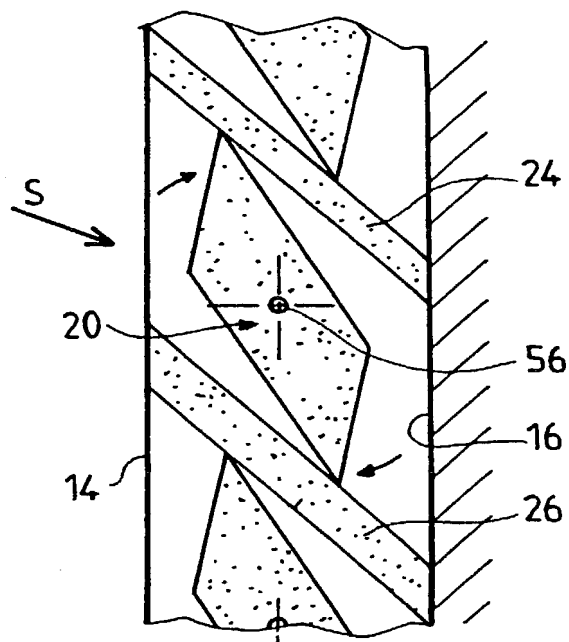


FIG. 14



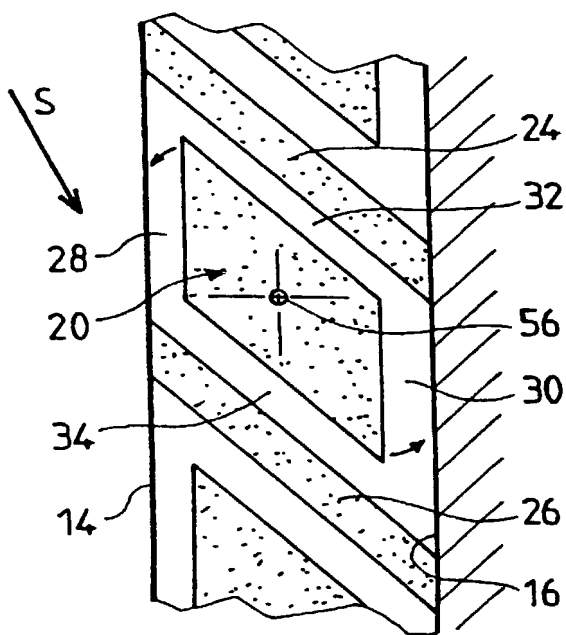


FIG. 15

6/10

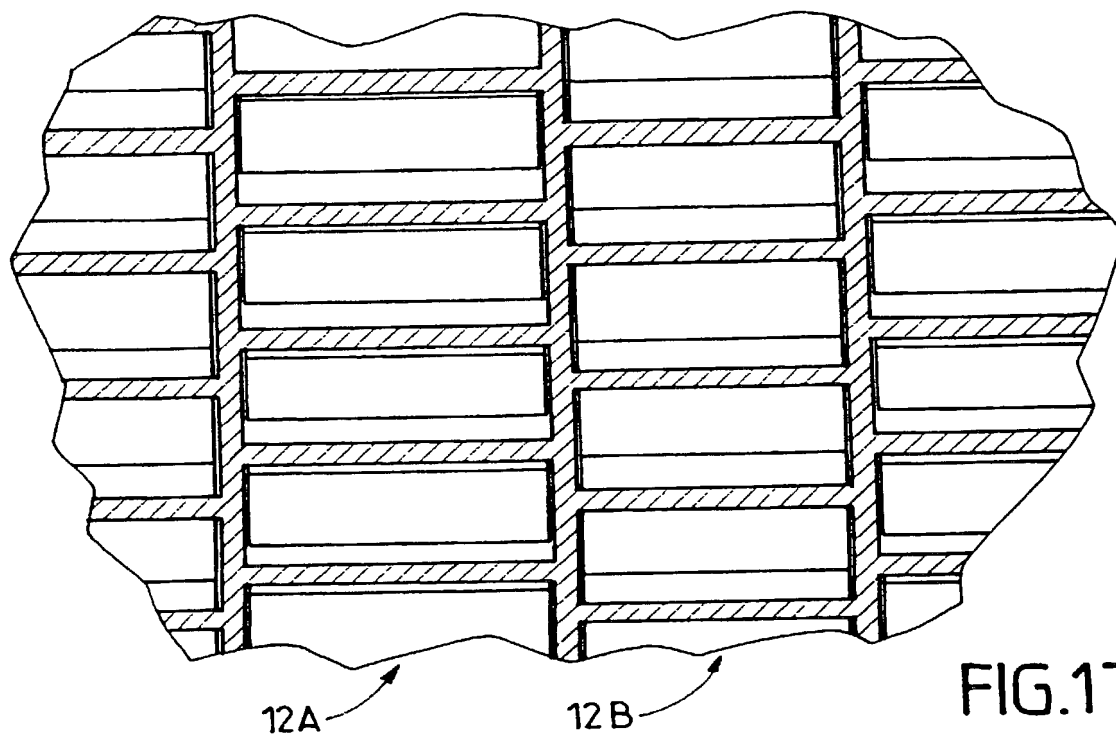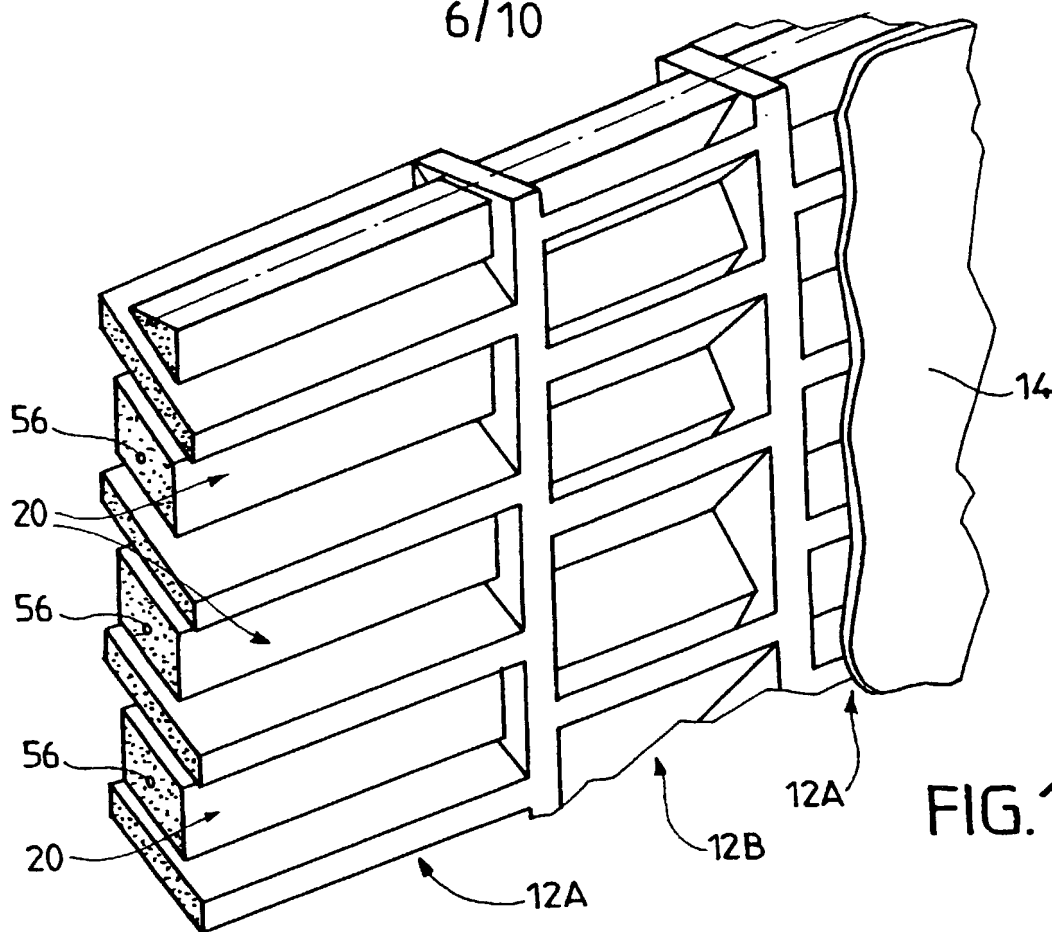

7/10

10/088303

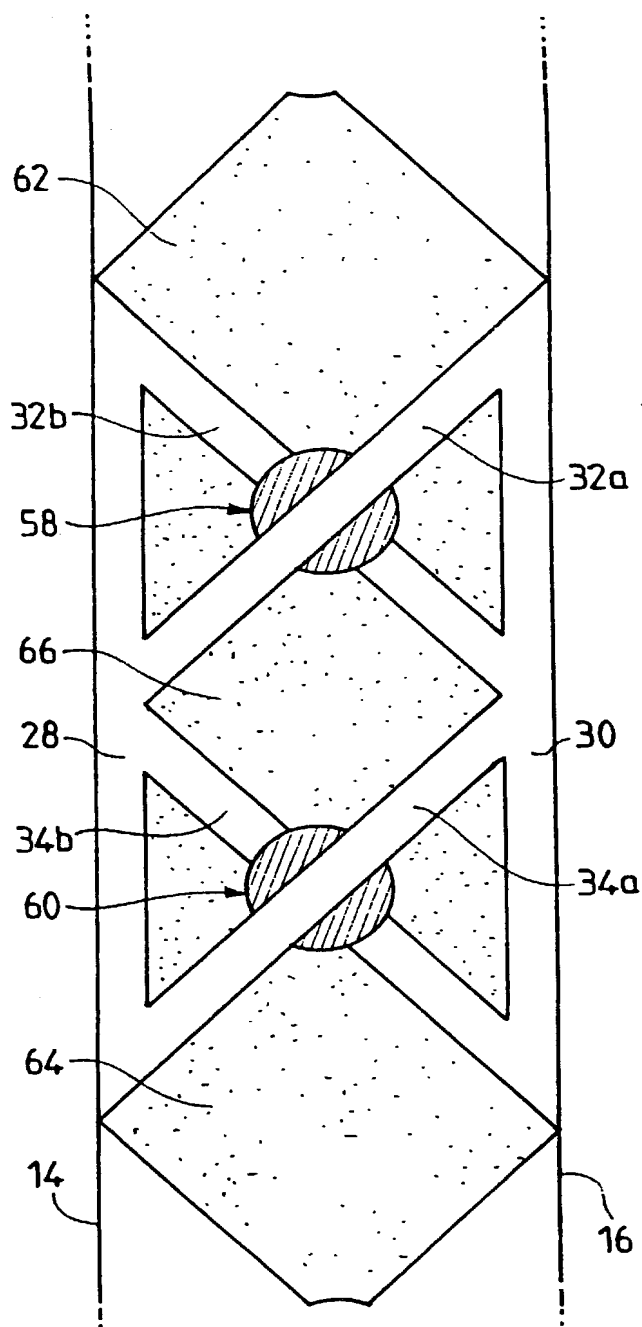


FIG. 18

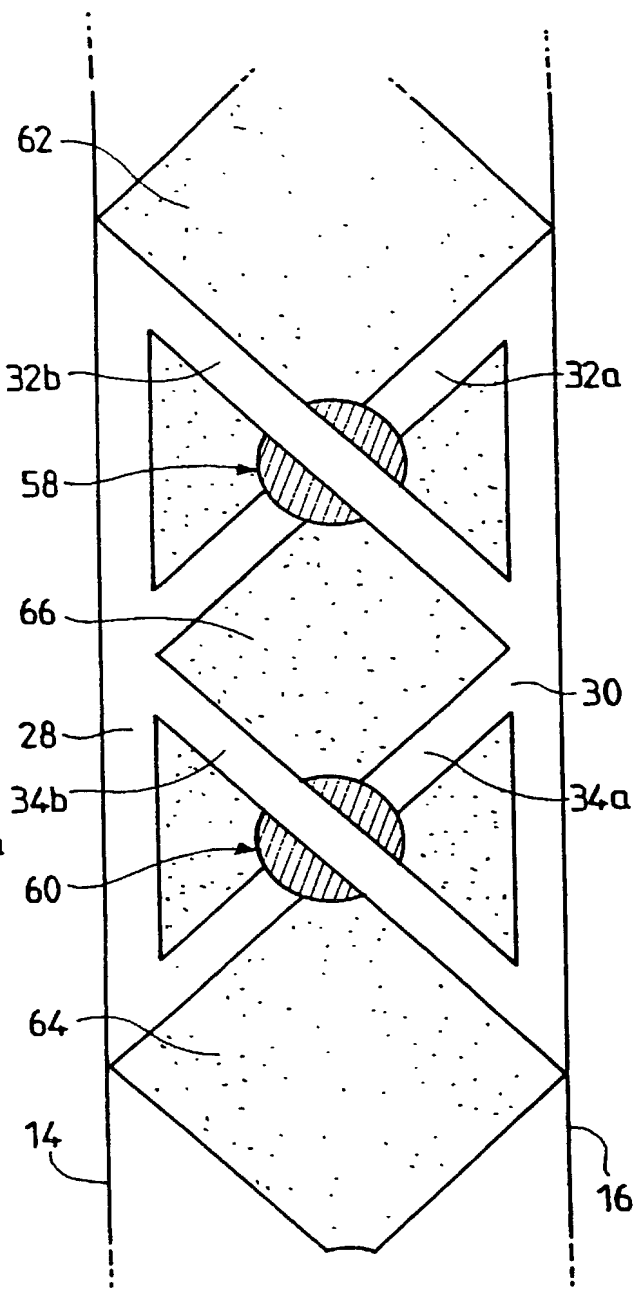


FIG. 19

8/10

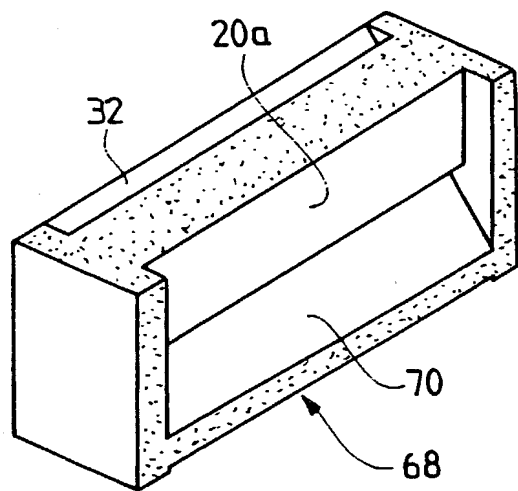


FIG. 20

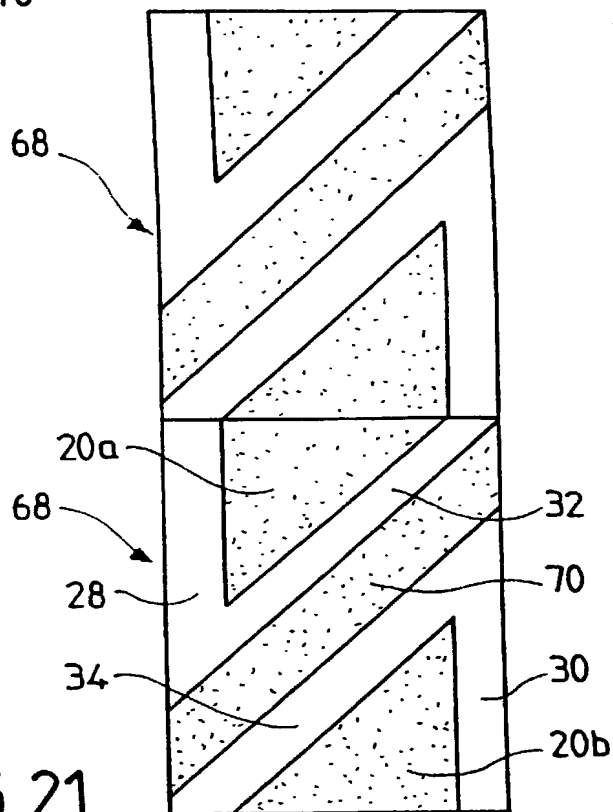


FIG. 21

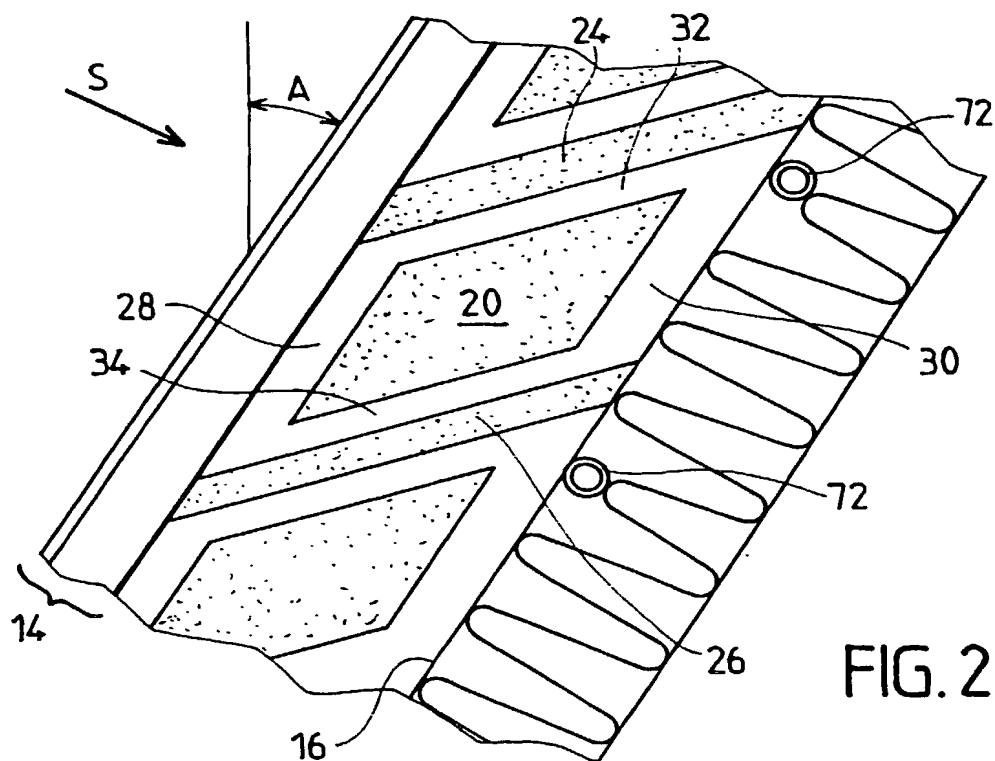


FIG. 22

9/10

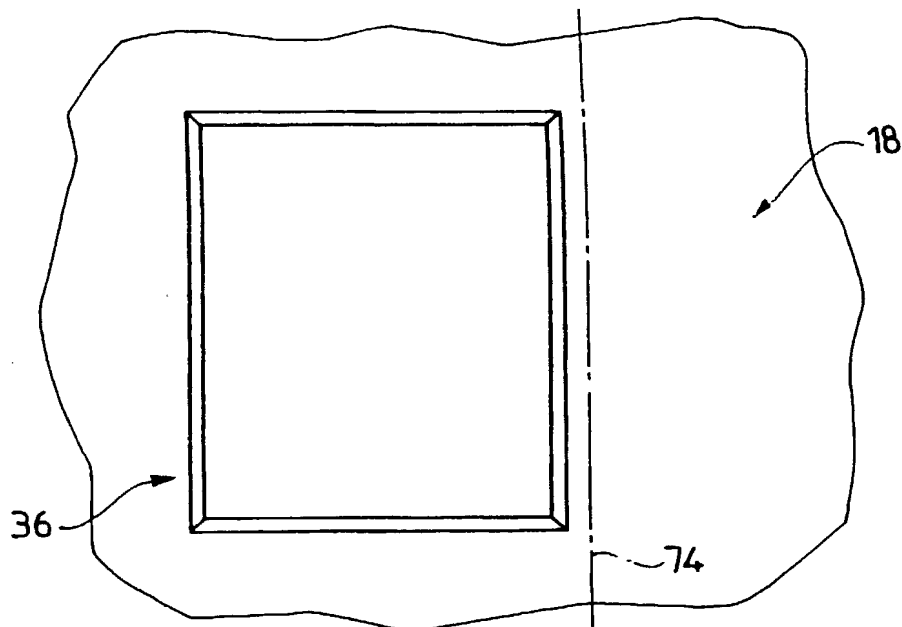


FIG. 23

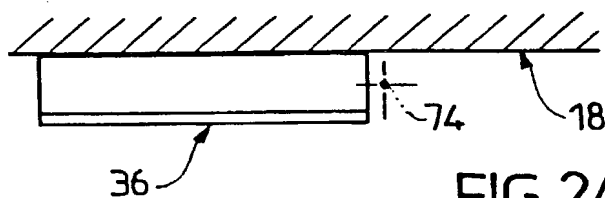


FIG. 24A

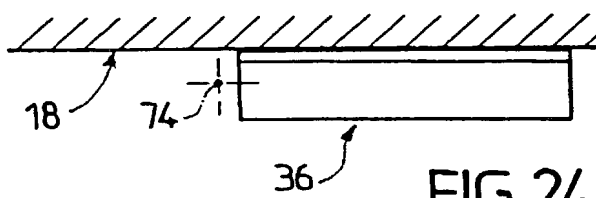


FIG. 24B

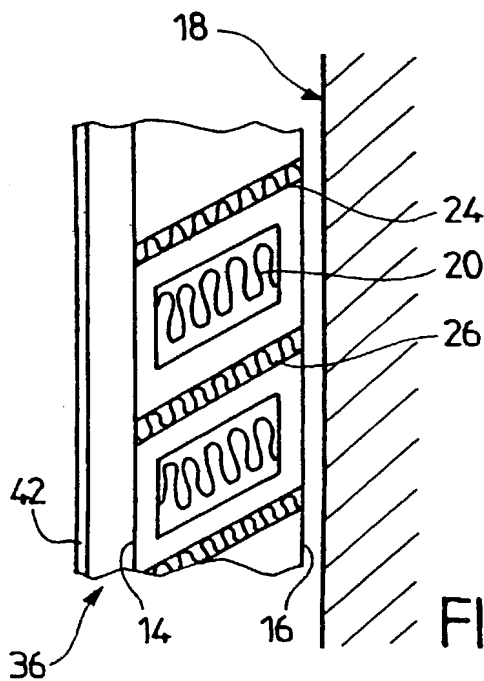


FIG. 25A

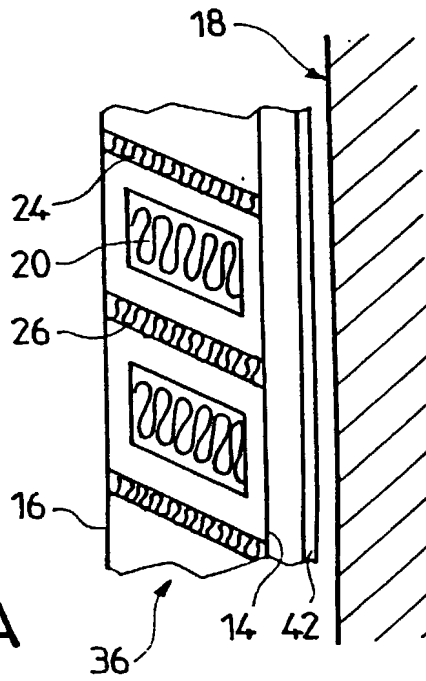


FIG. 25B

10/10

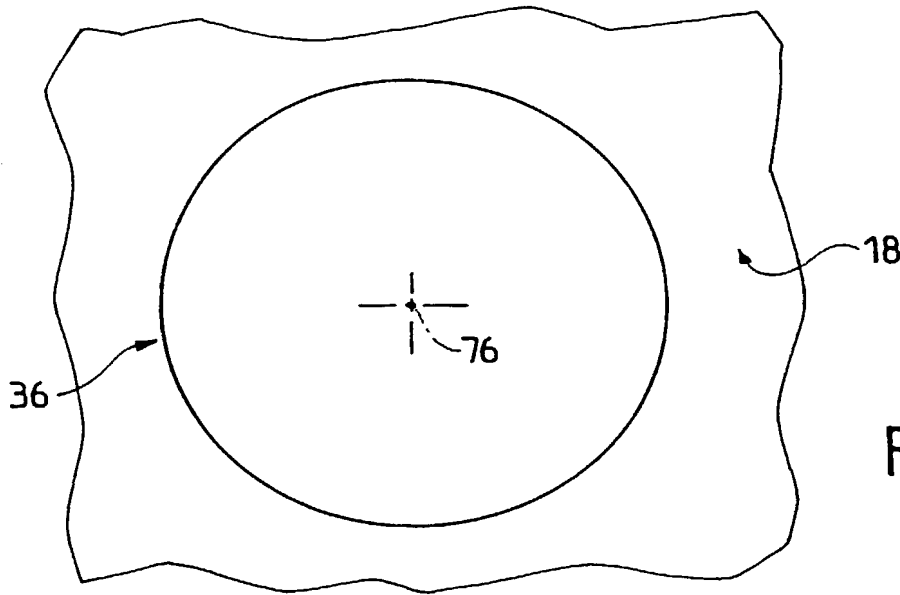


FIG. 26

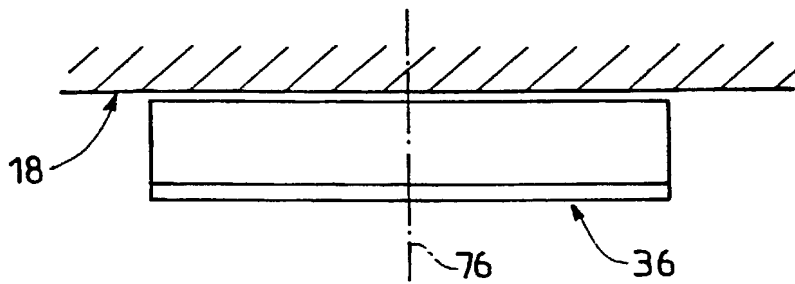


FIG. 27

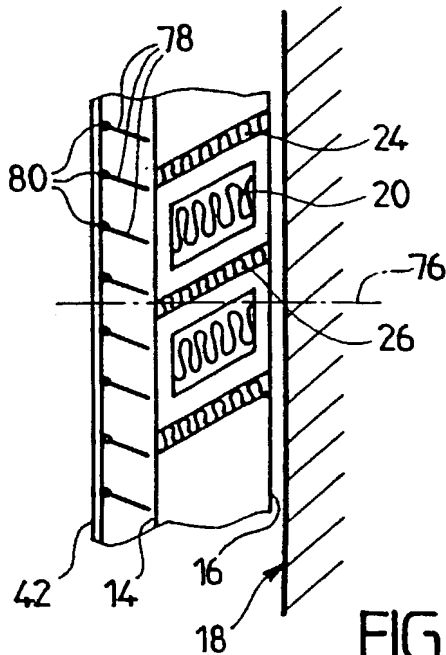


FIG. 28A

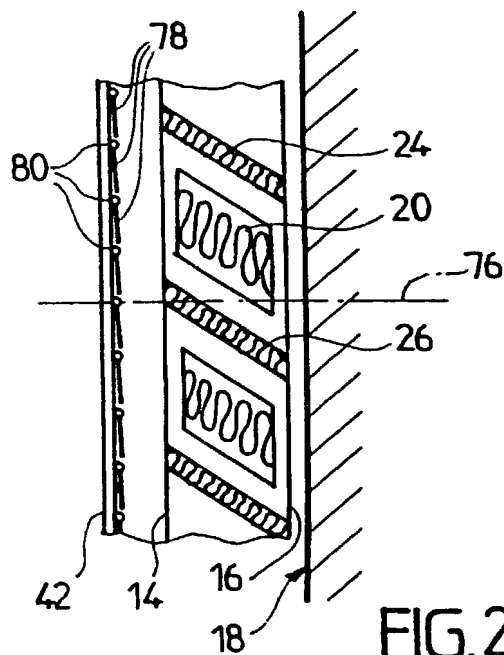


FIG. 28B

**COMBINED DECLARATION FOR PATENT APPLICATION AND POWER
OF ATTORNEY**

(Includes Reference to PCT International Applications)

ATTORNEY'S DOCKET NO.
154.1050

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

DEVICE FOR HEAT TRANSFER BETWEEN TWO WALLS

the specification of which (check only one item below):

☐ is attached hereto.

☒ was filed as United States application
Serial No. 10/088,303
on March 18, 2002
and was amended
on _____ (if applicable).

☐ was filed as PCT international application
Number _____
on _____
and was amended under PCT Article 19
on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:

| COUNTRY (if PCT, indicate "PCT") | APPLICATION NUMBER | DATE OF FILING (day, month, year) | PRIORITY CLAIMED UNDER 35 USC 119 |
|-------------------------------------|--------------------|--------------------------------------|---|
| FR | 99/12080 | 28/9/99 | <input checked="" type="checkbox"/> YES <input type="checkbox"/> NO |
| | | | <input type="checkbox"/> YES <input type="checkbox"/> NO |
| | | | <input type="checkbox"/> YES <input type="checkbox"/> NO |
| | | | <input type="checkbox"/> YES <input type="checkbox"/> NO |
| | | | <input type="checkbox"/> YES <input type="checkbox"/> NO |

ATTORNEY (Continued)

(Includes Reference to PCT International Applications)

NO.

154.1050

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:

| U.S. APPLICATIONS | | | STATUS (Check one) | | |
|--|------------------|---------------------------------------|--------------------|---------|-----------|
| U.S. APPLICATION NUMBER | U.S. FILING DATE | | PATENTED | PENDING | ABANDONED |
| | | | | | |
| PCT APPLICATIONS DESIGNATING THE U.S. | | | | | |
| PCT APPLICATION NO. | PCT FILING DATE | U.S. SERIAL NUMBERS ASSIGNED (if any) | | | |
| PCT/FR00/02608 | 8/20/00 | 10/088,303 | | | |
| | | | | | |

POWER OF ATTORNEY: I hereby appoint the attorneys and agents of Staas & Halsey LLP under USPTO Customer No. 21,171 to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:



21171

PATENT TRADEMARK OFFICE

| | | | | |
|-----|-------------------------|--|------------------------------------|---|
| 201 | FULL NAME OF INVENTOR | FAMILY NAME RYLEWSKI | FIRST GIVEN NAME Eugeniusz | SECOND GIVEN NAME * |
| | RESIDENCE & CITIZENSHIP | CITY Saint Remy les Chevreuse | STATE OR FOREIGN COUNTRY France | COUNTRY OF CITIZENSHIP France |
| | POST OFFICE ADDRESS | POST OFFICE ADDRESS 43 Bis, Avenue du General Leclerc | CITY Saint Remy les Chevreuse | STATE & ZIP CODE/COUNTRY F-78470, FRANCE |
| 202 | FULL NAME OF INVENTOR | FAMILY NAME | FIRST GIVEN NAME | SECOND GIVEN NAME |
| | RESIDENCE & CITIZENSHIP | CITY | STATE OR FOREIGN COUNTRY | COUNTRY OF CITIZENSHIP |
| | POST OFFICE ADDRESS | POST OFFICE ADDRESS | CITY | STATE & ZIP CODE/COUNTRY |

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

| | | |
|--|---------------------------|---------------------------|
| SIGNATURE OF INVENTOR 201 <i>Eugeniusz Rylewski</i> | SIGNATURE OF INVENTOR 202 | SIGNATURE OF INVENTOR 203 |
| DATE <i>July 15, 2002</i> | DATE | DATE |